


FRONT MOTORBIKE RACING STAND

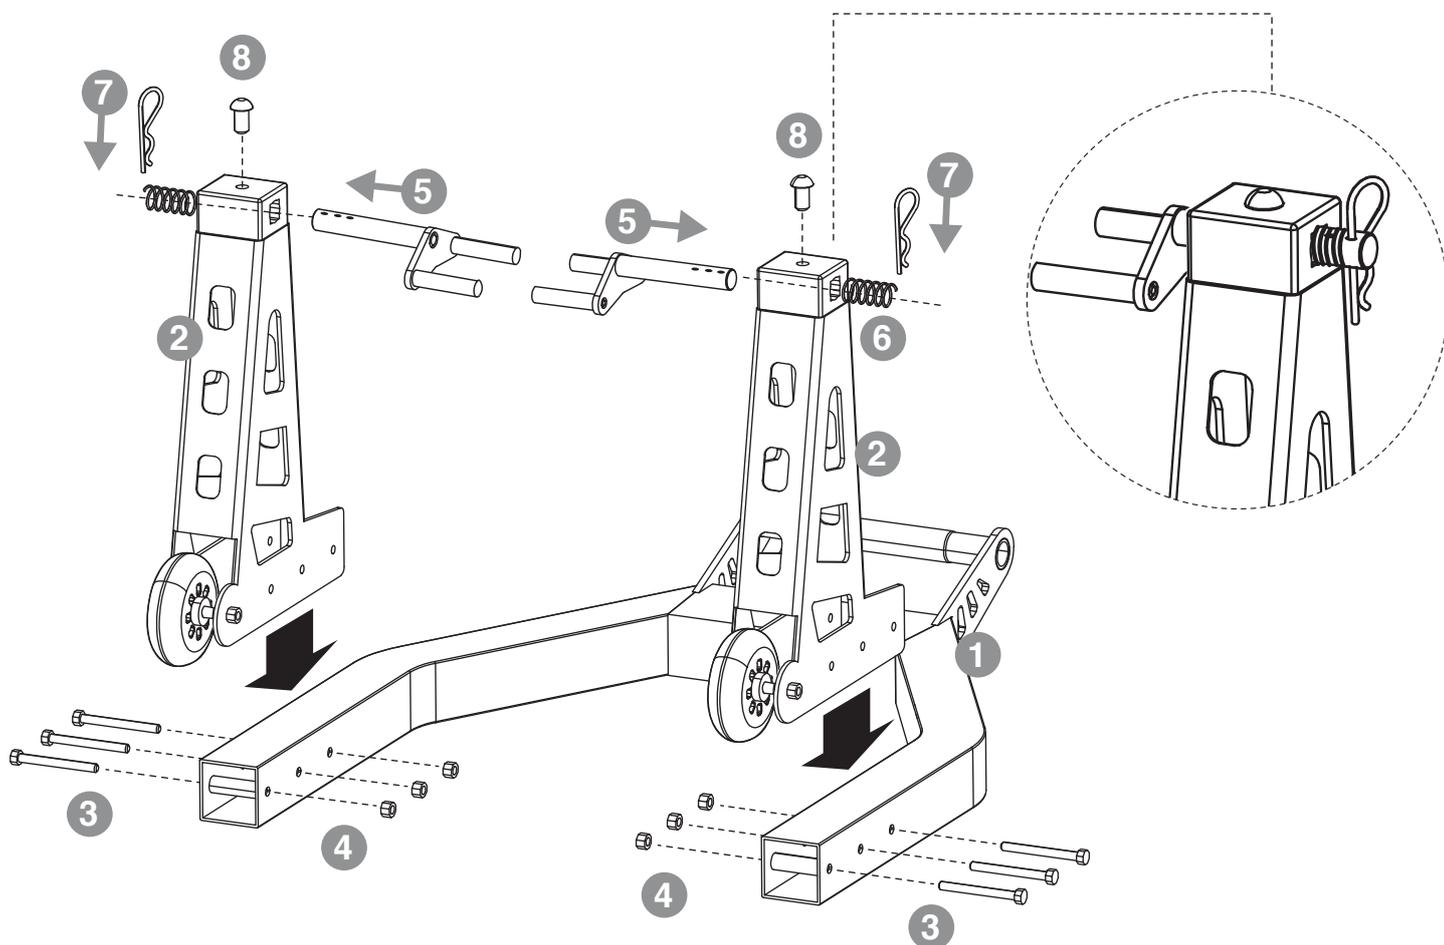

ASSEMBLY

- SECURE THE LIFTING HANDLE (1) TO THE SUPPORT ARMS (2) USING THE M6 BOLTS (3) AND NUTS (4).
- INSERT FRONT ATTACHMENT PEGS (5) WITH THE SPRINGS (6) ON THE OTHER SIDE AND SECURE IT WITH THE SAFETY CLIPS (7) IN THE 3 POSSIBLE POSITIONS/HOLES
- TIGHTEN THE M10 BOLT (8) ON EACH SIDE TO HOLD THE PEG IN PLACE.

PLEASE, ENSURE THE RESPECTIVE ADAPTERS ARE USED FOR THE PROPER APPLICATION FOR MAXIMUM STABILITY DURING LIFTING. MAX. SUPPORTER WEIGHT: 220KG.